

FEATURES

- | Complete Voltage Range 3.3 to 200 Volts
- | High peak reverse power dissipation
- | High reliability
- | Low leakage current



DO-15

MECHANICAL DATA

- | Case: DO-15 Molded plastic
- | Polarity: Color band denotes cathode end
- | Mounting position: Any

APPROVALS

RoHS	Compliance with 2011/65/EU
HF	Compliance with IEC61249-2-21:2003

MAXIMUM RATINGS ($T_A=25^{\circ}\text{C}$)

Parameter	Symbol	Value	Unit
DC Power dissipation at $T_L = 75^{\circ}\text{C}^{(1)}$	P_D	5.0	W
Maximum forward voltage at $I_F=1\text{A}$	V_F	1.2	V
Maximum Thermal Resistance Junction to Ambient Air	$R_{\theta JA}$	45	$^{\circ}\text{C}/\text{W}$
Storage temperature range	T_J, T_{STG}	-65 to +200	$^{\circ}\text{C}$

Note:

(1) T_L =Lead temperature at 3/8" (9.5mm)from body

ELECTRICAL CHARACTERISTICS

Part Number	Device Marking Code	Nominal Zener Voltage		Maximum Zener Impedance			Maximum Reverse Leakage Current		Maximum DC Zener Current
		$V_Z @ I_{ZT}$ (V)	I_{ZT} (mA)	$Z_{ZT} @ I_{ZT}$ (Ω)	$Z_{ZK} @ I_{ZK}$ (Ω)	I_{ZK} (mA)	$I_R @ V_R$ (μA)	V_R (V)	I_{ZM} (mA)
1N5333B	1N5333B	3.3	380	3.0	400	1.0	300	1.0	1440
1N5334B	1N5334B	3.6	350	2.5	500	1.0	150	1.0	1320
1N5335B	1N5335B	3.9	320	2.0	500	1.0	50	1.0	1220
1N5336B	1N5336B	4.3	290	2.0	500	1.0	10	1.0	1100
1N5337B	1N5337B	4.7	260	2.0	450	1.0	5.0	1.0	1010
1N5338B	1N5338B	5.1	240	1.5	400	1.0	1.0	1.0	930
1N5339B	1N5339B	5.6	220	1.0	400	1.0	1.0	2.0	856
1N5340B	1N5340B	6.0	200	1.0	300	1.0	1.0	3.0	790
1N5341B	1N5341B	6.2	200	1.0	200	1.0	1.0	3.0	765
1N5342B	1N5342B	6.8	175	1.0	200	1.0	10	5.2	700
1N5343B	1N5343B	7.5	175	1.5	200	1.0	10	5.7	630
1N5344B	1N5344B	8.2	150	1.5	200	1.0	10	6.2	580
1N5345B	1N5345B	8.7	150	2.0	200	1.0	10	6.6	545
1N5346B	1N5346B	9.1	150	2.0	150	1.0	7.5	6.9	520
1N5347B	1N5347B	10	125	2.0	125	1.0	5.0	7.6	475
1N5348B	1N5348B	11	125	2.5	125	1.0	5.0	8.4	430
1N5349B	1N5349B	12	100	2.5	125	1.0	2.0	9.1	395
1N5350B	1N5350B	13	100	2.5	100	1.0	1.0	9.9	365
1N5351B	1N5351B	14	100	2.5	75	1.0	1.0	10.6	340
1N5352B	1N5352B	15	75	2.5	75	1.0	1.0	11.5	315
1N5353B	1N5353B	16	75	2.5	75	1.0	1.0	12.2	295
1N5354B	1N5354B	17	70	2.5	75	1.0	0.5	12.9	280
1N5355B	1N5355B	18	65	2.5	75	1.0	0.5	13.7	265
1N5356B	1N5356B	19	65	3.0	75	1.0	0.5	14.4	250
1N5357B	1N5357B	20	65	3.0	75	1.0	0.5	15.2	237
1N5358B	1N5358B	22	50	3.5	75	1.0	0.5	16.7	216
1N5359B	1N5359B	24	50	3.5	100	1.0	0.5	18.2	198
1N5360B	1N5360B	25	50	4.0	110	1.0	0.5	19.0	190
1N5361B	1N5361B	27	50	5.0	120	1.0	0.5	20.6	176
1N5362B	1N5362B	28	50	6.0	130	1.0	0.5	21.2	170
1N5363B	1N5363B	30	40	8.0	140	1.0	0.5	22.8	158
1N5364B	1N5364B	33	40	10	150	1.0	0.5	25.1	144
1N5365B	1N5365B	36	30	11	160	1.0	0.5	27.4	132

Part Number	Device Marking Code	Nominal Zener Voltage		Maximum Zener Impedance			Maximum Reverse Leakage Current		Maximum DC Zener Current
		$V_Z @ I_{ZT}$ (V)	I_{ZT} (mA)	$Z_{ZT} @ I_{ZT}$ (Ω)	$Z_{ZK} @ I_{ZK}$ (Ω)	I_{ZK} (mA)	$I_R @ V_R$ (μ A)	V_R (V)	I_{ZM} (mA)
1N5366B	1N5366B	39	30	14	170	1.0	0.5	29.7	122
1N5367B	1N5367B	43	30	20	190	1.0	0.5	32.7	110
1N5368B	1N5368B	47	25	25	210	1.0	0.5	35.8	100
1N5369B	1N5369B	51	25	27	230	1.0	0.5	38.8	93.0
1N5370B	1N5370B	56	20	35	280	1.0	0.5	42.6	86.0
1N5371B	1N5371B	60	20	40	350	1.0	0.5	45.5	79.0
1N5372B	1N5372B	62	20	42	400	1.0	0.5	47.1	76.0
1N5373B	1N5373B	68	20	44	500	1.0	0.5	51.7	70.0
1N5374B	1N5374B	75	20	45	620	1.0	0.5	56.0	63.0
1N5375B	1N5375B	82	15	65	720	1.0	0.5	62.2	58.0
1N5376B	1N5376B	87	15	75	760	1.0	0.5	66.0	54.5
1N5377B	1N5377B	91	15	75	760	1.0	0.5	69.2	52.5
1N5378B	1N5378B	100	12	90	800	1.0	0.5	76.0	47.5
1N5379B	1N5379B	110	12	125	1000	1.0	0.5	83.6	43.0
1N5380B	1N5380B	120	10	170	1150	1.0	0.5	91.2	39.5
1N5381B	1N5381B	130	10	190	1250	1.0	0.5	98.8	36.6
1N5382B	1N5382B	140	8.0	230	1500	1.0	0.5	106	34.0
1N5383B	1N5383B	150	8.0	330	1500	1.0	0.5	114	31.6
1N5384B	1N5384B	160	8.0	350	1650	1.0	0.5	122	29.4
1N5385B	1N5385B	170	8.0	380	1750	1.0	0.5	129	28.0
1N5386B	1N5386B	180	5.0	430	1750	1.0	0.5	137	26.4
1N5387B	1N5387B	190	5.0	450	1850	1.0	0.5	144	25.0
1N5388B	1N5388B	200	5.0	480	1850	1.0	0.5	152	23.6

Note : (1) Suffix " B " indicates $\pm 5\%$ tolerance, suffix " A " indicates $\pm 10\%$ tolerance.

CHARACTERISTIC CURVES

Fig.1-Power Temperature Derating Curve

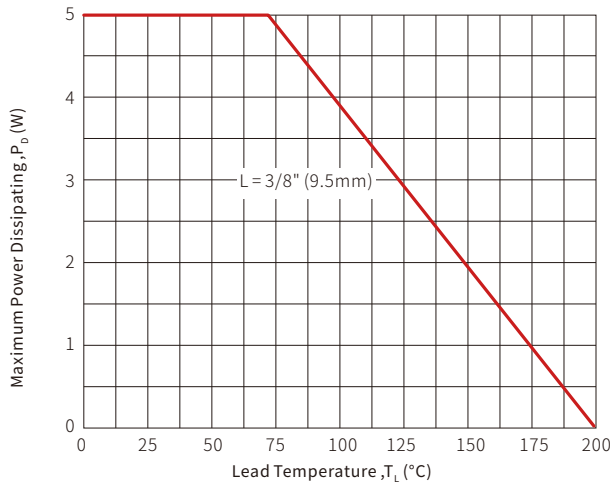


Fig.2-Typical Thermal Resistance

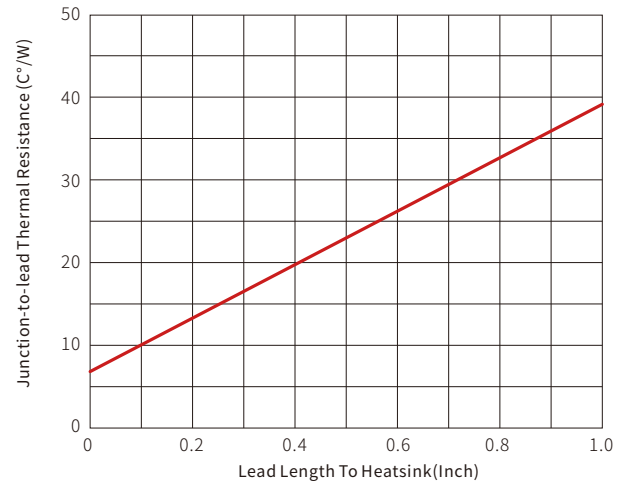


Fig.3-Maximum Non-Repetitive Surg Current Versus Nominal Zener Voltage

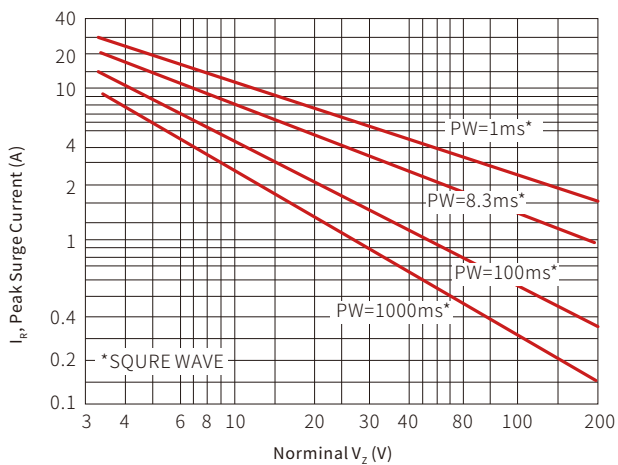


Fig.4-Peak Surg Current Versus Pulse Width



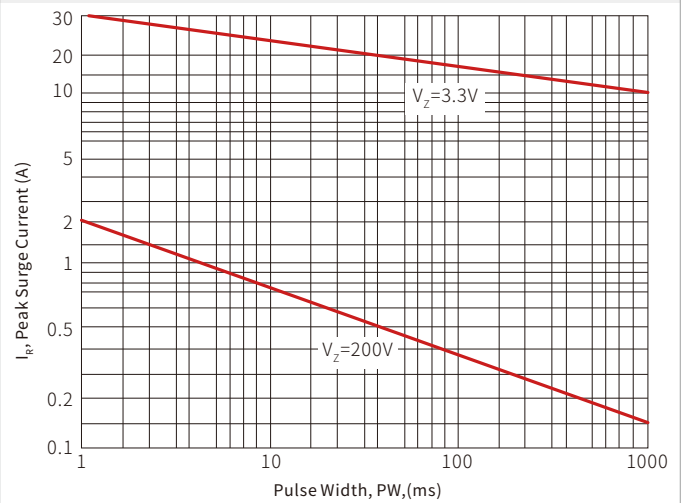


Fig.5-Typical Thermal Response L , Lead Length=3/8 Inch

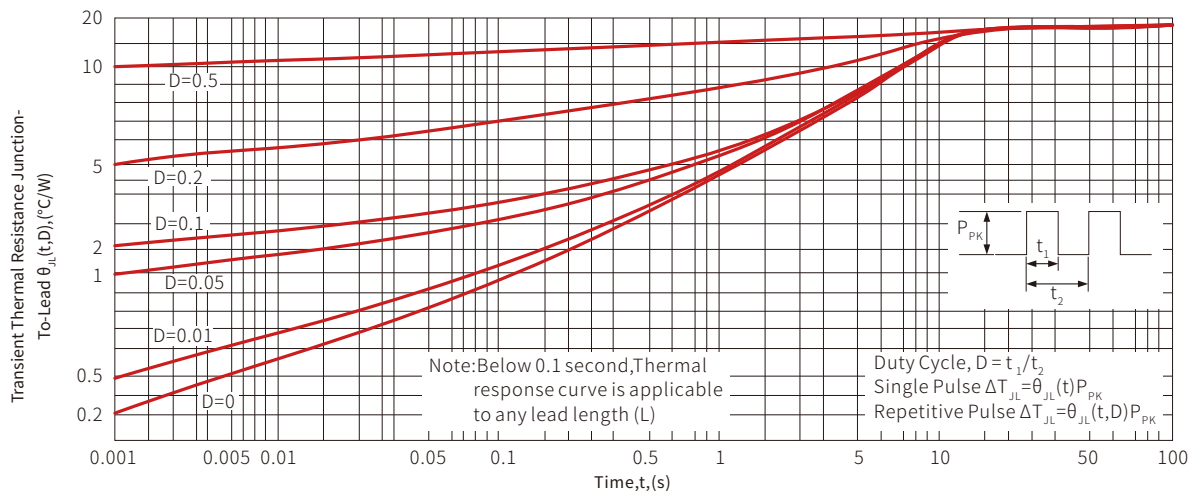


SOLDERING PARAMETERS

Reflow Condition		Lead-free assembly
Pre Heat	Temperature Max ($T_{s(min)}$)	150 $^{\circ}\text{C}$
	Temperature Max ($T_{s(max)}$)	200 $^{\circ}\text{C}$
	Time (min to max) (t_s)	60 – 180 secs
Average ramp up rate (Liquidus Temp (T_L) to peak $T_{s(max)}$ to T_L - Ramp-up Rate)		3 $^{\circ}\text{C}/\text{second}$ max
Reflow	Temperature (T_L) (Liquidus)	217 $^{\circ}\text{C}$
	Time (min to max) (t_L)	60 – 150 seconds
Peak Temperature (T_p)		260 $^{\circ}\text{C}$
Time within 5 $^{\circ}\text{C}$ of actual peak Temperature (t_p)		20 – 40 seconds
Ramp-down Rate		6 $^{\circ}\text{C}/\text{second}$ max
Time 25 $^{\circ}\text{C}$ to peak Temperature (T_p)		8 minutes max.
Do not exceed		260 $^{\circ}\text{C}$

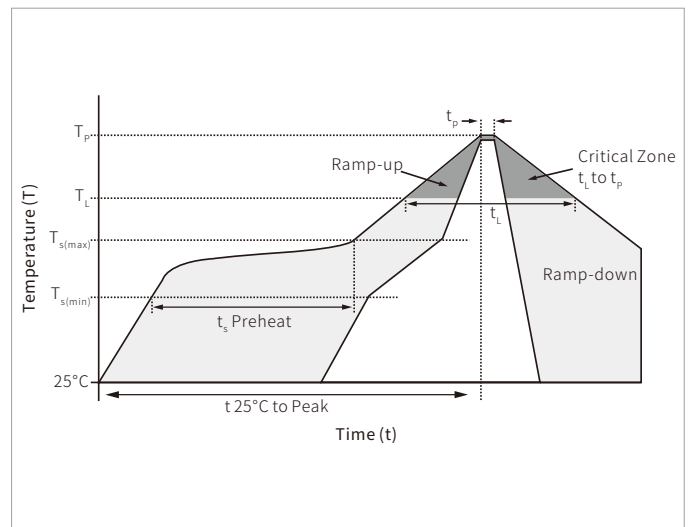

DO-15 PACKAGE INFORMATION

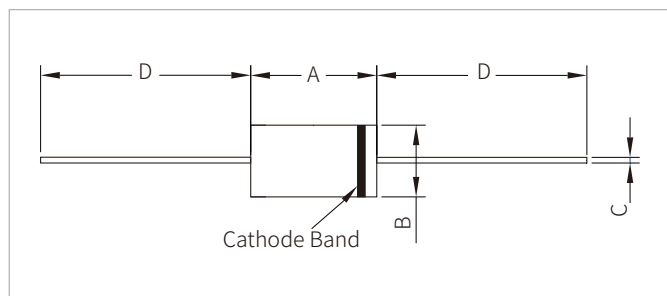

Ref.	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	5.80	7.60	0.230	0.300
B	2.60	3.60	0.104	0.140
C	0.70	0.90	0.026	0.034
D	25.40	-	1.000	-

ORDERING INFORMATION

Part Number	Component Package	Per Carton	Description
1N5333B-1N5388B	DO-15	3000pcs	Box

Headquarters

No.3387 Shendu Road
Pujiang I&E Park
Minhang Shanghai China
201000

Hotline

400-021-5756

Web

<https://www.semiware.com>

Sales Center

Tel: 86-21-3463-7458
Email: sales18@semiware.com

Customer Service

Tel: 86-21-5484-1001
Email: sales17@semiware.com

Technical Support

Tel: 86-21-3463-7654
Email: fae01@semiware.com

Complaint & Suggestions

Tel: 86-21-3463-7172
Ext: 8868
Email: cs03@semiware.com

By QR Code

Website



Wechat

To find your local partner within Semiware's global website: www.semiware.com

© 2022 Semiware Semiconductor Inc.

The content of this document has been carefully checked and understood. However, neither Semiware nor its subsidiaries assume any liability whatsoever for any errors or inaccuracies of this document and the consequences thereof. Published specifications are subject to change without notice. Product suitability for any area of application must ultimately be determined by the customer. In all cases, products must never be operated outside their published specifications. Semiware does not guarantee the availability of all published products. This disclaimer shall be governed by substantive Chinese law and resulting disputes shall be settled by the courts at the place of business of Semiware. Latest publications and a complete disclaimer can be downloaded from the Semiware website. All trademarks recognized.