


FEATURES


- Complementary Pair
- Epitaxial Planar Die Construction
- Ideal for low Power Amplification and Switching
- One 3904(NPN), one 3906(PNP)



SOT-363



Marking



Schematic Symbol

MECHANICAL DATA

- SOT-363 small outline plastic package
- Epoxy UL: 94V-0
- Mounting position: Any

APPROVALS

RoHS	Compliance with 2011/65/EU
HF	Compliance with IEC61249-2-21:2003

MAXIMUM RATINGS ($T_A=25^{\circ}\text{C}$)

Parameter	Symbol	Value		Unit
		(NPN)3904	(PNP)3906	
Collector-Base Voltage	V_{CBO}	60	-40	V
Collector-Emitter Voltage	V_{CEO}	40	-40	
Emitter-Base Voltage	V_{EBO}	5	-5	
Collector Current	I_C	200	-200	mA
Collector Power Dissipation	P_C	200	200	mW
Thermal Resistance From Junction To Ambient	$R_{\theta JA}$	625	625	$^{\circ}\text{C}/\text{W}$
Junction Temperature	T_J	150	150	$^{\circ}\text{C}$
Storage Temperature	T_{STG}	-55~+150	-55~+150	$^{\circ}\text{C}$

ELECTRICAL CHARACTERISTICS (T_A=25°C)

(NPN)3904

Parameter	Symbol	Test Conditions	Min.	Typ.	Max.	Unit
Collector-base breakdown voltage	$V_{(BR)CBO}$	$I_C=10\mu A, I_E=0$	60			V
Collector-emitter breakdown voltage	$V_{(BR)CEO}$	$I_C=1mA, I_B=0$	40			
Emitter-base breakdown voltage	$V_{(BR)EBO}$	$I_E=10\mu A, I_C=0$	5			
Collector cut-off current	I_{CBO}	$V_{CB}=30V, I_E=0$			50	nA
Collector cut-off current	I_{CEO}	$V_{CE}=30V, I_B=0$			500	
Emitter cut-off current	I_{EBO}	$V_{EB}=5V, I_C=0$			50	
DC current gain	$h_{FE(1)}$	$V_{CE}=1V, I_C=0.1mA$	40			
	$h_{FE(2)}$	$V_{CE}=1V, I_C=1mA$	70			
	$h_{FE(3)}$	$V_{CE}=1V, I_C=10mA$	100		300	
	$h_{FE(4)}$	$V_{CE}=1V, I_C=50mA$	60			
	$h_{FE(5)}$	$V_{CE}=1V, I_C=100mA$	30			
Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_C=10mA, I_B=1mA$			0.2	V
	$V_{CE(sat)}$	$I_C=50mA, I_B=5mA$			0.3	
Base-emitter saturation voltage	$V_{BE(sat)}$	$I_C=10mA, I_B=1mA$	0.65		0.85	
	$V_{BE(sat)}$	$I_C=50mA, I_B=5mA$			0.95	
Transition frequency	f_T	$V_{CE}=20V, I_C=20mA, f=100MHz$	300			MHz
Collector output capacitance	C_{ob}	$V_{CB}=5V, I_E=0, f=1MHz$			4.0	pF
Noise figure	N_F	$V_{CE}=5V, I_C=0.1mA, f=1kHz, R_B=1K\Omega, \Delta f=200MHz$			5.0	dB
Delay time	t_d	$V_{CC}=3V, V_{BE(off)}=0.5V, I_C=10mA, I_{B1}=1mA$			35	nS
Rise time	t_r				35	
Storage time	t_s	$V_{CC}=3V, I_C=10mA, I_{B1}=I_{B2}=1mA$			200	
Fall time	t_f				50	

*Pulse test: pulse width $\leq 300\mu s$, duty cycle $\leq 2.0\%$.

ELECTRICAL CHARACTERISTICS (T_A=25°C)

(PNP)3906


Parameter	Symbol	Test Conditions	Min.	Typ.	Max.	Unit
Collector-base breakdown voltage	$V_{(BR)CBO}$	$I_C=-10\mu A, I_E=0$	-40			V
Collector-emitter breakdown voltage	$V_{(BR)CEO}$	$I_C=-1mA, I_B=0$	-40			
Emitter-base breakdown voltage	$V_{(BR)EBO}$	$I_E=-10\mu A, I_C=0$	-5			
Collector cut-off current	I_{CBO}	$V_{CB}=-30V, I_E=0$			-50	nA
Emitter cut-off current	I_{EBO}	$V_{EB}=-5V, I_C=0$			-50	
DC current gain	$h_{FE(1)}$	$V_{CE}=-1V, I_C=-0.1mA$	60			
	$h_{FE(2)}$	$V_{CE}=-1V, I_C=-1mA$	80			
	$h_{FE(3)}$	$V_{CE}=-1V, I_C=-10mA$	100		300	
	$h_{FE(4)}$	$V_{CE}=-1V, I_C=-50mA$	60			
	$h_{FE(5)}$	$V_{CE}=-1V, I_C=-100mA$	30			
Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_C=-10mA, I_B=-1mA$			-0.25	V
	$V_{CE(sat)}$	$I_C=-50mA, I_B=-5mA$			-0.40	
Base-emitter saturation voltage	$V_{BE(sat)}$	$I_C=-10mA, I_B=-1mA$	-0.65		-0.85	
	$V_{BE(sat)}$	$I_C=-50mA, I_B=-5mA$			-0.95	
Transition frequency	f_T	$V_{CE}=-20V, I_C=-10mA, f=100MHz$	250			MHz
Collector output capacitance	C_{ob}	$V_{CB}=-5V, I_E=0, f=1MHz$			4.5	pF
Noise figure	N_F	$V_{CE}=-5V, I_C=-0.1mA, f=1kHz, R_g=1k\Omega, \Delta f=200MHz$			4.0	dB
Delay time	t_d	$V_{CC}=-3V, V_{BE(off)}=-0.5V, I_C=-10mA, I_{B1}=-1mA$			35	nS
Rise time	t_r				35	
Storage time	t_s	$V_{CC}=-3V, I_C=-10mA, I_{B1}=I_{B2}=-1mA$			225	
Fall time	t_f				75	

*Pulse test: pulse width $\leq 300\mu s$, duty cycle $\leq 2.0\%$.


TYPICAL CHARACTERISTICS

(NPN)3904


Static Characteristic

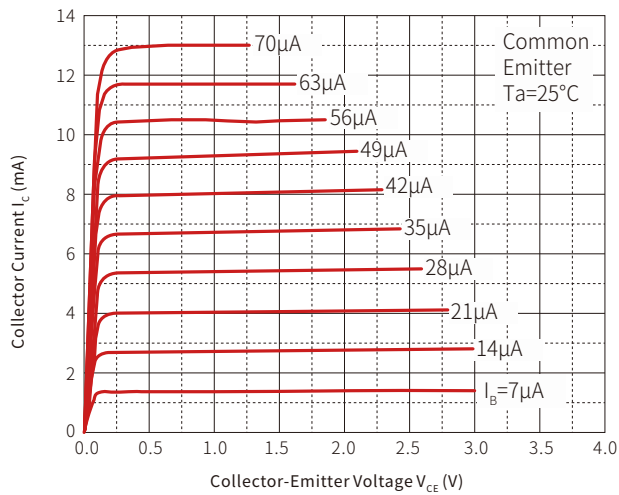


h_{FE} — I_c


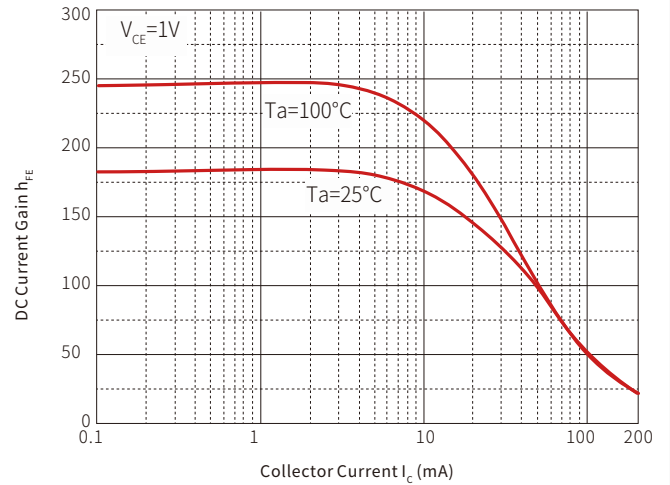


$V_{CE sat}$ — I_c


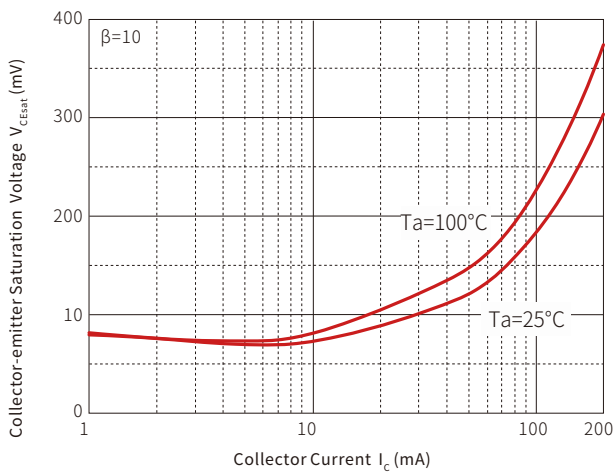






$V_{BE sat}$ — I_c


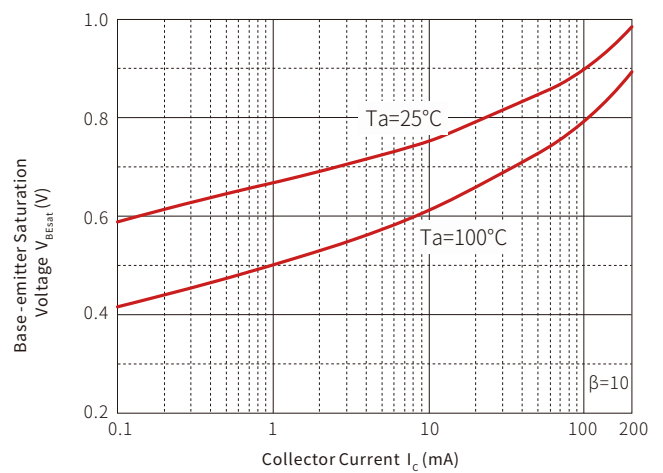


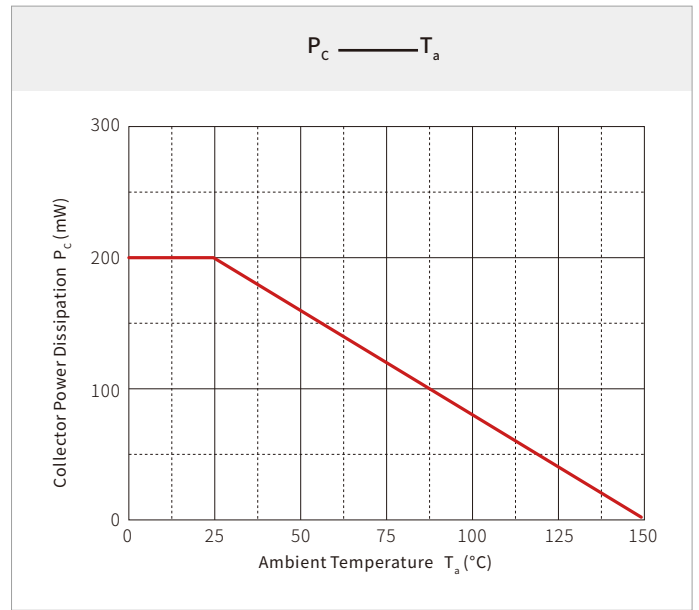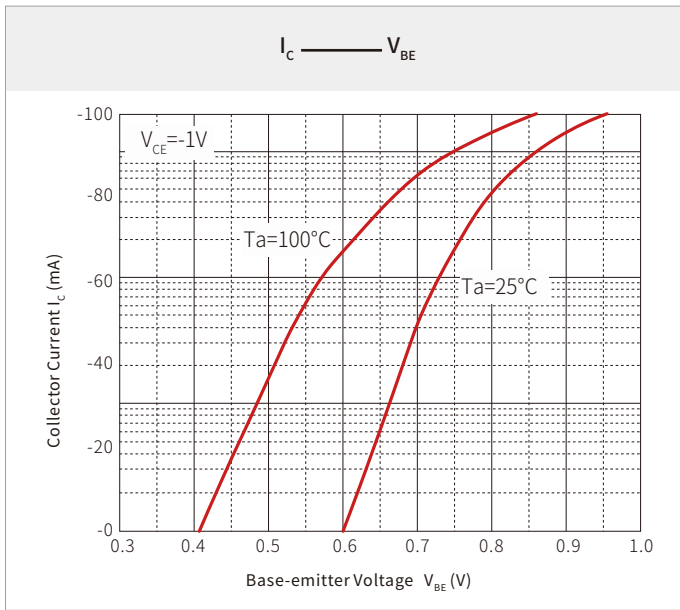

(PNP)3906

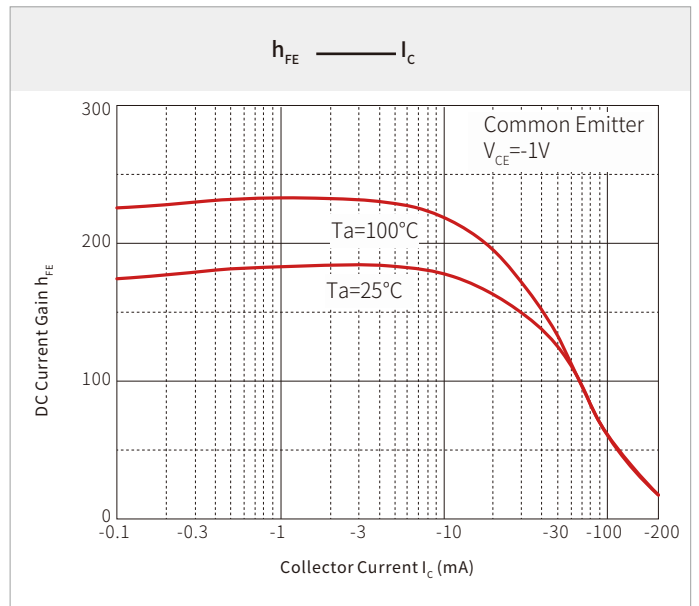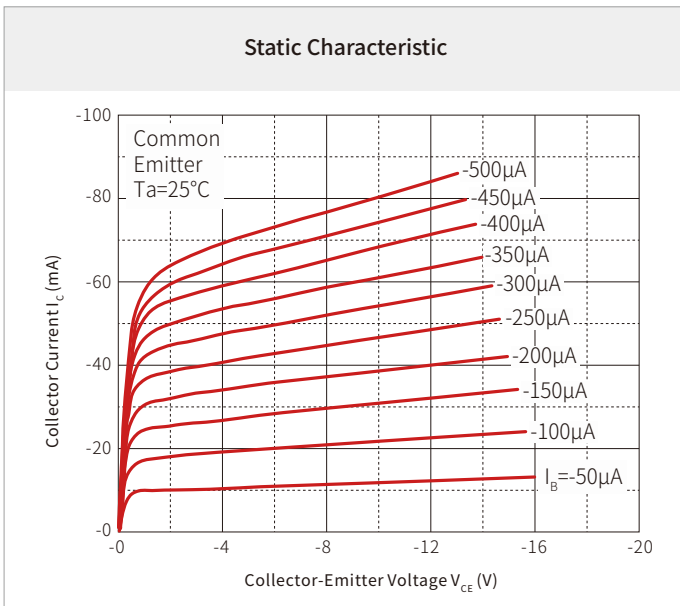


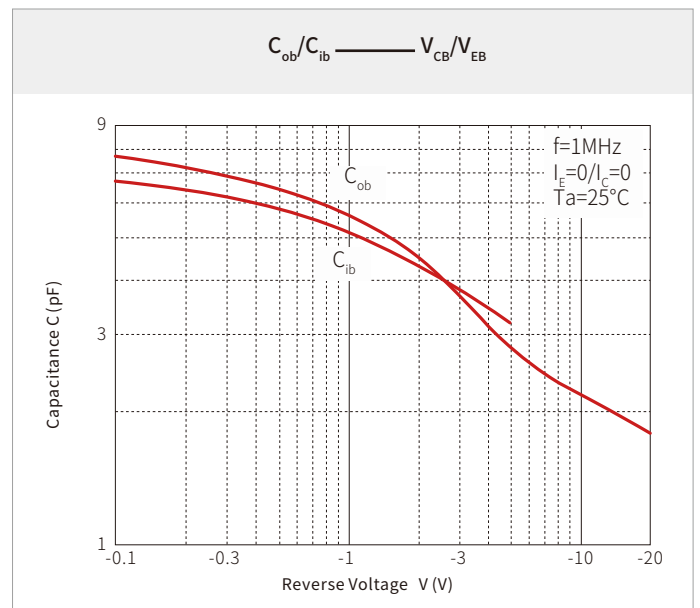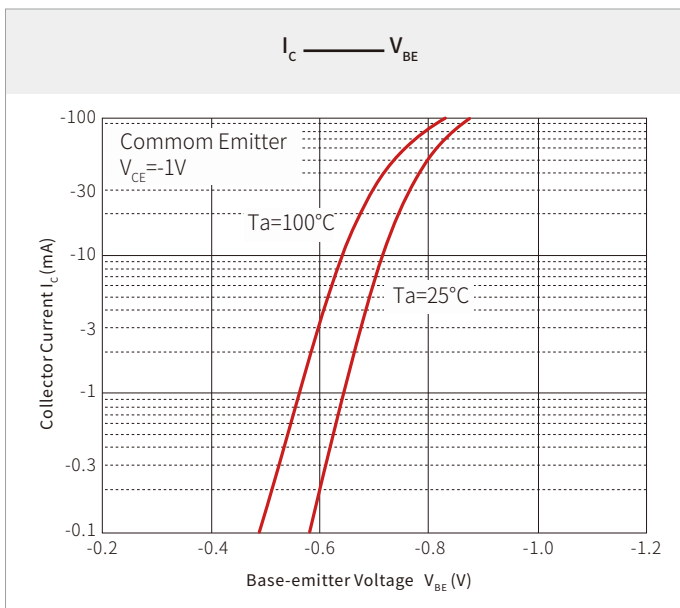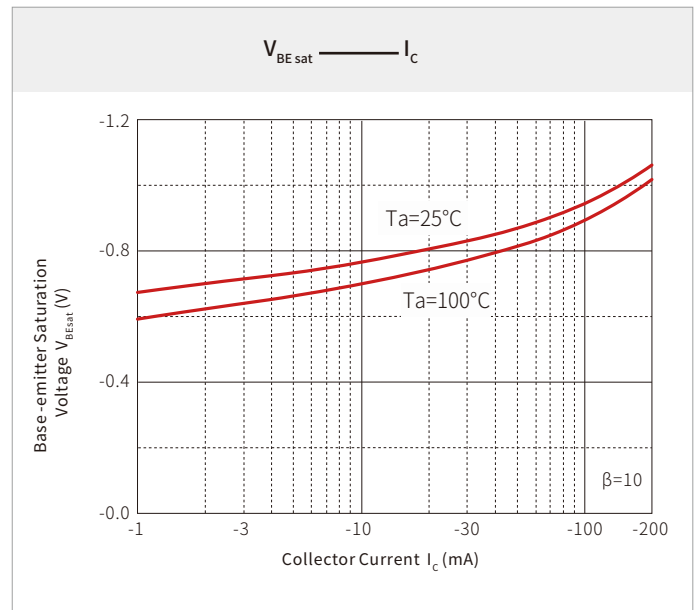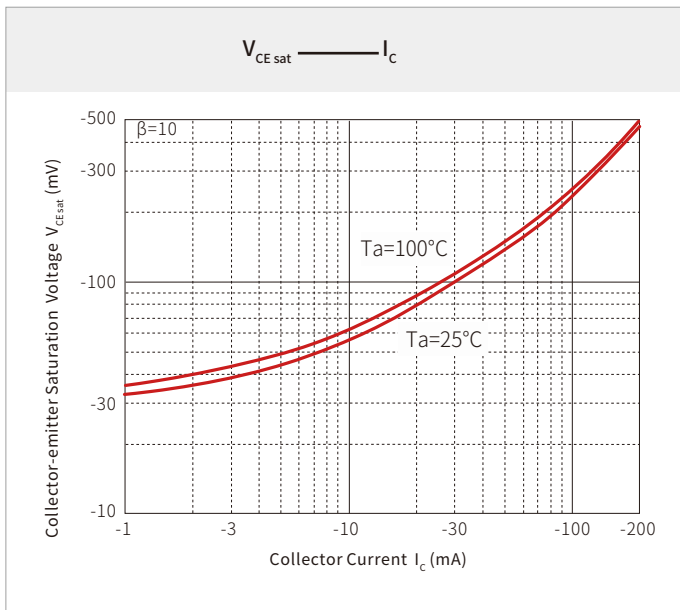

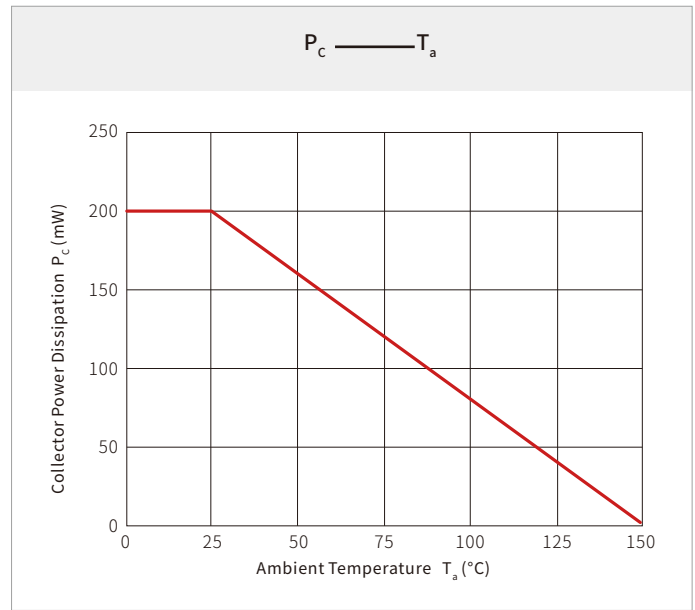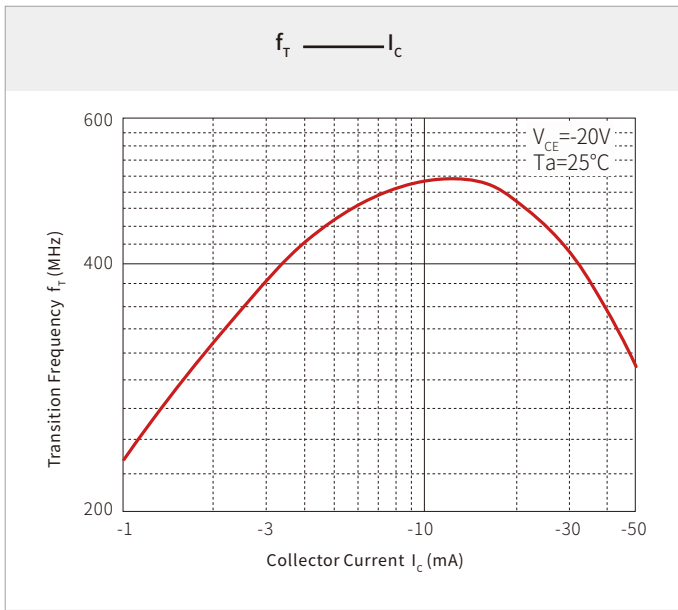


SOLDERING PARAMETERS

Reflow Condition		Lead-free assembly
Pre Heat	Temperature Max ($T_{s(min)}$)	150 $^\circ C$
	Temperature Max ($T_{s(max)}$)	200 $^\circ C$
	Time (min to max) (t_s)	60 – 180 secs
Average ramp up rate (Liquidus Temp (T_L) to peak)		3 $^\circ C$ /second max
$T_{s(max)}$ to T_L - Ramp-up Rate		3 $^\circ C$ /second max
Reflow	Temperature (T_L) (Liquidus)	217 $^\circ C$
	Time (min to max) (t_L)	60 – 150 seconds
Peak Temperature (T_p)		260 $^\circ C$
Time within 5 $^\circ C$ of actual peak Temperature (t_p)		20 – 40 seconds
Ramp-down Rate		6 $^\circ C$ /second max
Time 25 $^\circ C$ to peak Temperature (T_p)		8 minutes max.
Do not exceed		260 $^\circ C$

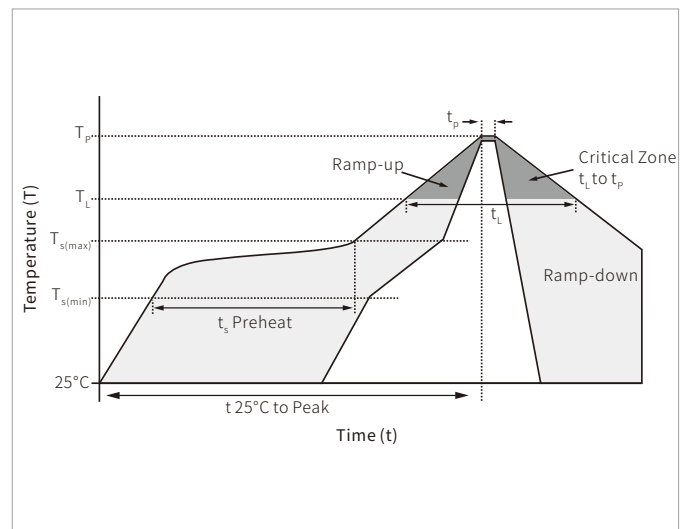


SOT-363 PACKAGE INFORMATION

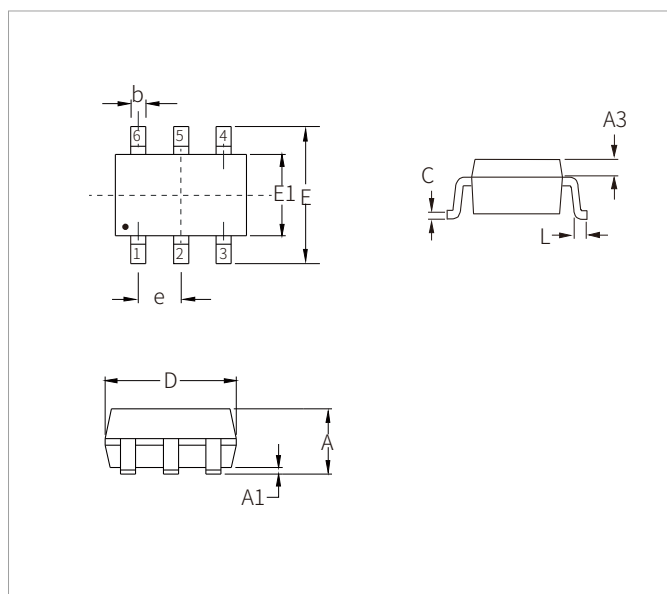

Ref.	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	0.80	1.10	0.031	0.043
A1	0.00	0.10	0.000	0.004
A3	0.20REF		0.008REF	
D	1.80	2.20	0.070	0.086
E1	1.15	1.35	0.045	0.053
E	2.00	2.40	0.078	0.094
e	0.65BSC		0.026BSC	
b	0.10	0.40	0.004	0.016
L	0.10	0.50	0.004	0.020
C	0.10	0.25	0.004	0.010

RECOMMENDED PAD LAYOUT DIMENSIONS

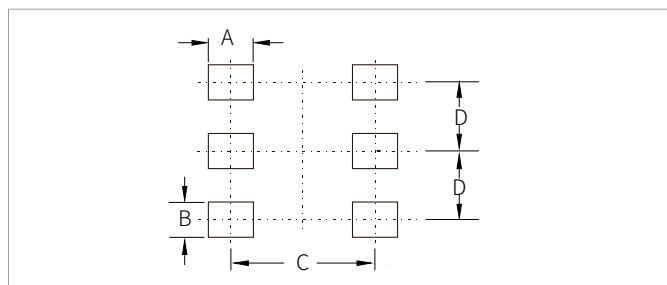

Ref.	Millimeters	Inches
A	0.50	0.0197
B	0.40	0.0157
C	1.90	0.0748
D	0.65	0.0250

ORDERING INFORMATION

Part Number	Component Package	QTY/Reel	Reel Size
MMDT3946	SOT-363	3000PCS	7"

Headquarters

No.3387 Shendu Road
Pujiang I&E Park
Minhang Shanghai China
201000

Hotline

400-021-5756

Web

<https://www.semiware.com>

Sales Center

Tel: 86-21-3463-7458
Email: sales18@semiware.com

Customer Service

Tel: 86-21-5484-1001
Email: sales17@semiware.com

Technical Support

Tel: 86-21-3463-7654
Email: fae01@semiware.com

Complaint & Suggestions

Tel: 86-21-3463-7172
Ext: 8868
Email: cs03@semiware.com

By QR Code

Website



Wechat

To find your local partner within Semiware' s global website: www.semiware.com

© 2022 Semiware Semiconductor Inc.

The content of this document has been carefully checked and understood. However, neither Semiware nor its subsidiaries assume any liability whatsoever for any errors or inaccuracies of this document and the consequences thereof. Published specifications are subject to change without notice. Product suitability for any area of application must ultimately be determined by the customer. In all cases, products must never be operated outside their published specifications. Semiware does not guarantee the availability of all published products. This disclaimer shall be governed by substantive Chinese law and resulting disputes shall be settled by the courts at the place of business of Semiware. Latest publications and a complete disclaimer can be downloaded from the Semiware website. All trademarks recognized.